


SHACKLE (B.C)

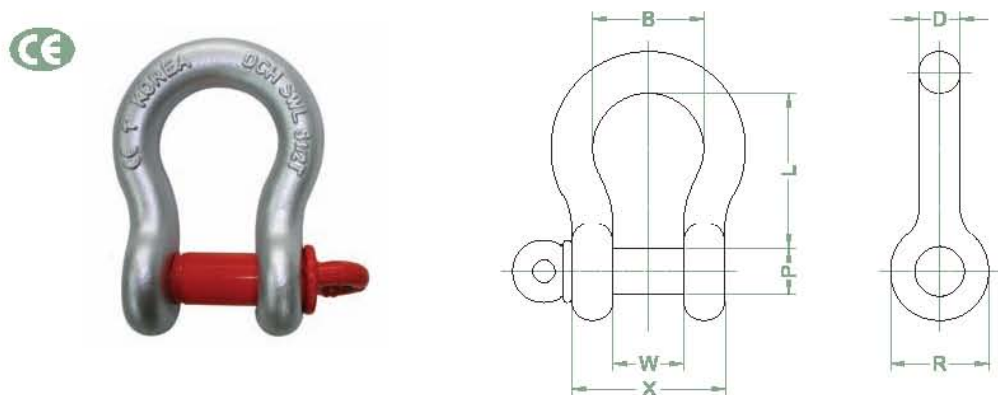

SPECIFICATION

| Product Code | Size (inch) | SWL (WLL) (ton) | Dimension(mm) | | | | | | | Weight (kg) |
|--------------|-------------|-----------------|---------------|----|-----|----|-----|------|------|-------------|
| | | | B | D | L | P | R | W | X | |
| SHBC-001 | 5/16 | 0.75 | 20 | 8 | 32 | 10 | 25 | 13.5 | 29.5 | 0.1 |
| SHBC-002 | 3/8 | 1 | 24 | 10 | 36 | 12 | 28 | 17 | 37 | 0.1 |
| SHBC-003 | 1/2 | 2 | 34 | 13 | 48 | 16 | 30 | 21 | 47 | 0.3 |
| SHBC-004 | 5/8 | 3.25 | 43 | 16 | 60 | 19 | 40 | 27 | 59 | 0.6 |
| SHBC-005 | 3/4 | 4.75 | 51 | 19 | 73 | 22 | 48 | 32 | 70 | 1 |
| SHBC-006 | 7/8 | 6.5 | 58 | 22 | 85 | 25 | 54 | 37 | 81 | 1.5 |
| SHBC-007 | 1 | 8.5 | 68 | 25 | 95 | 28 | 60 | 43 | 94 | 2.2 |
| SHBC-008 | 1-1/8 | 9.5 | 74 | 28 | 109 | 32 | 67 | 46 | 103 | 3.2 |
| SHBC-009 | 1-1/4 | 12 | 83 | 32 | 119 | 35 | 76 | 51 | 115 | 4.3 |
| SHBC-010 | 1-3/8 | 13.5 | 92 | 35 | 134 | 38 | 84 | 57 | 127 | 5.9 |
| SHBC-011 | 1-1/2 | 17 | 98 | 38 | 146 | 42 | 92 | 60 | 136 | 7.7 |
| SHBC-012 | 1-3/4 | 25 | 127 | 45 | 177 | 50 | 109 | 73 | 163 | 14.2 |
| SHBC-013 | 2 | 35 | 146 | 51 | 197 | 58 | 127 | 83 | 185 | 20.3 |

Standard

- **Material**_ Forged carbon steel(Body), Forged alloy steel(Pin)
- **Test Load**_ Proof Load = SWL(WLL)×2, Breaking Load = SWL(WLL)×6
- **Surface**_ Body(Hot Dip Galvanized), Pin(Painted, Orange Color)
- **Reference**_ Federal specification, RR-C-271D
- **ETC**_ Available certificate of NDT (M/T, U/T), 3rd Inspection test report

Commercial

- **Material**_ Forged carbon steel
- **Test Load**_ Proof Load = SWL(WLL)×1.5, Breaking Load = SWL(WLL)×3
- **Surface**_ Electro galvanized
- **ETC**_ Available certificate of NDT (M/T, U/T), 3rd Inspection test report